

Inner Diameter8.50"
 Outer Diameter11.75"
 Thickness0.75"
 Wireless Ring Weight14 oz.
 Local Ring Weight.....14 oz.

TECHNICAL SPECIFICATIONS

Voltage Input.....10.5 - 16.4 VDC
 Amperage.....1.3 amps @ 12 VDC
 Dimmer PWM Frequency20 kHz
 Wireless Transceiver2.4GHz / Private ID
 Default DMX Addresses509 (Warm) / 510 (Cool)
 Default DMX Address Range...500-512 User Changeable
 Full Universe DMX Options.....Custom Range can be set prior to delivery
 Max Output Both Colors.....280 fc @ 3'
 Max Output One Color.....2800° - 133 fc / 6000° 161 fc @ 3'
 Ambient Operating Temp10°F / -12°C to 102°F / 39°C

**WIRELESS RCU
 COLOR PRESETS:**

2800°
 3000°
 3200°
 3800°
 4300°
 4800°
 5600°
 6000°

1/8+ Green Filter
 Option Available
 (Higher CRI mixes better
 w/ black body sources)

Shipping Weight20.5 Lbs.
 Shipping Dimensions20.66" x 17.20" x 8.40"

AVAILABLE ACCESSORIES:

Additional Controller - 200' Range
 14dBi External Antenna Kit - 800' Range
 Laminated 1/8+ Green Filter
 1/2 Mask
 1/4 Mask

MATTE BOX CONFIGURATIONS:


MB5 / 25 Clip On - to 20mm
 Most 4x5 Studio - to 24mm /
 18mm w/o bellows
 6x6 Studio - to 40mm - XLO supports this
Cinering™ | XLO now available!

POWER ADAPTERS:

12V Lilon Battery w/ 2.1/5.6mm Barrel F
 AC Adapter - 2.1/5.6mm Barrel F
 JST M - 2.1/5.6mm Barrel F
 4-Pin XLR M - 2.1/5.6mm Barrel F
 P-Tap M - 2.1/5.6mm Barrel F
 2 Pin Lemo M - 2.1/5.6mm Barrel F
 3 Pin Fischer M - 2.1/5.6mm Barrel F

POWER & HEAD EXTENSIONS:

PH3 Head Extension, 3' (Local Ring Only)
 2.1/5.6mm Barrel Zoom Lens Extension, 3'
 JST Extension, 1'

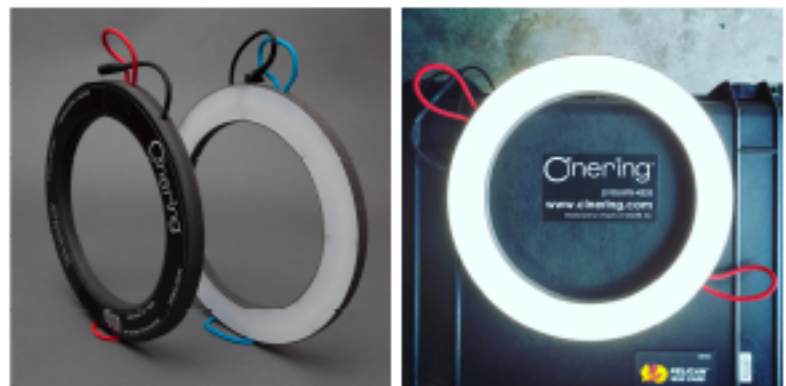

WIRELESS CONTROL OPTIONS:

RCU - Wireless Pocket Console w/ built in Transceiver
 Stand Alone Transceiver - for use with Lighting Consoles
 See Download for DMX Values 2800° - 6000° / 100° Increments & Available Profiles

Wireless Control Ring & Wireless Pocket Console Contain Transceiver Modules. These devices comply with Part 15 of FCC Rules.
 US FCC ID: OUR-XBEEPRO | Canada IC: 4214A-XBEEPRO | Europe CE ETSI1